

Nota/Note
 Ottiche intercambiabili senza ausilio di utensili
 Exchangeable optics without using of tools

MUSE 80 S/3

FASCIO/BEAM EL | ST | MD | LA

Proiettore LED a binario orientabile con ottiche intercambiabili.
 Adjustable track-mounted LED projector, exchangeable optics.

Corpo in estruso d'alluminio verniciato con polveri epossidiche previa fosfatazione. Dissipatore in alluminio estruso. Ottica in policarbonato metallizzato fascio largo (cod. LA) fascio medio (cod. MD) fascio stretto (cod. ST) fascio ellittico (cod. EL). Sorgente luminosa LED. Emissione diretta. Sistema di fissaggio a binario con alimentazione integrata nell'adattatore CAE. A richiesta: dimmerabile DALI (cod. DL).

Extruded aluminium body painted with epoxy powders after phosphating. Extruded aluminium heatsink. Metallized polycarbonate louver wide beam (code LA) medium beam (code MD) narrow beam (code ST) elliptical beam (code EL). LED light source. Direct light emission. Track mounting system with built-in electronic driver CAE. On request: dimmable DALI (code DL).

5Y WARRANTY
5% FAILURE RATE

60.000 h
LED LIFETIME L90B10


100.000 h
LED LIFETIME L70B50

Lumen	Watt	Lumen Watt Out	mA	Codice Code	Fascio Beam	K	Alimentazione Power Supply	Colore Colour
2150	18	≤ 120	500	HRM8S31	EL: fascio ellittico elliptical beam	WW: 2700 W: 3000 X: 3500 N: 4000	-: CAE elettronica electronic DL: DALI	Standard: ● WI: White Irazu ● BL: Black Lava Su richiesta /On request: ● SB: Silver Bombalai ● BL: Bronze Lario ● RR: Rust Rame ● BF: Beige Futura ● GK: Gold Karkar ● BT: Blue Telica
2950	26	≤ 114	700	HRM8S32	ST: fascio stretto narrow beam			
3350	30	≤ 112	800	HRM8S33	MD: fascio medio medium beam LA: fascio largo wide beam			

A richiesta | On request

Temperatura ambiente min. - max: -10°+40° C.
 Lumen: flusso totale in uscita con 3000K CRI90;
 Variazione flusso con CRI85 + 8%, con CRI95 - 8%.
 Watt: potenza di sistema
 Tolleranza ± 10%

Min and Max room temperature: -10°+40° C.
 Lumen: total output flux with 3000K CRI90;
 Flux variation with CRI85 + 8%, with CRI95 - 8%.
 Watt: system power
 Tolerance ± 10%

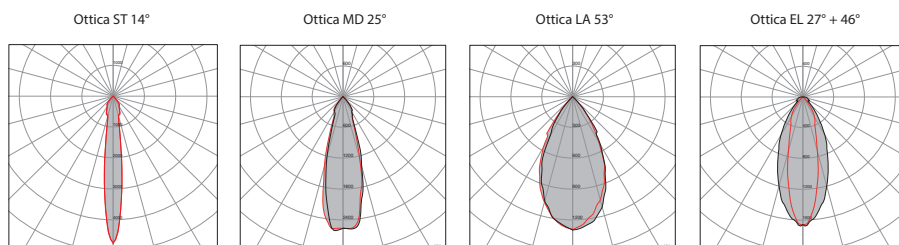

H (m)	Ø (m)	H (m)	Ø (m)	H (m)	Ø (m)	H (m)	Ø (m)
1	0.3	1	0.4	1	1.0	1	0.8
2	0.5	2	0.9	2	2.0	2	1.6
3	1.7	3	1.3	3	2.8	3	2.5
4	1.0	4	1.8	4	4.0	4	3.3
5	1.2	5	2.2	5	5.0	5	4.2